

Wireless Control



General Description

IOT's wireless control units contain two separate relay switches allowing for individual control through the online sensors portal. The control unit relays can be switched on/off manually through the software or automatically by any wireless sensor notification assigned to a single sensor or group of sensors when a specified condition is detected.

Wireless Control Features

- Allows for automated control
- 10-amp or 30-amp units available
- Two separate relays per unit
- Can be triggered by any Monnit wireless sensor notification to activate upon detection of set conditions
- Can be triggered manually through online monitoring interface
- A/C powered, always on for immediate response from paired sensors.

Applications

- Facilities / Building Operations
- Automated Systems
- Smart Buildings
- Manufacturing Processes
- Machine Control
- Lighting Control
- Sump and Water Evacuation
- Agriculture and Greenhouses

Principle of Operation

The control unit has two separate relays that can be toggled on/off at will by either: (a) the IOT Sensor ID web portal; (b) any device that triggers a notification on the same network.

Four LED indicators let the user know if the device is powered on, communicating with the online system and the status of each relay.

The user can manually turn a relay on or off through the software. Manual changes are either: (a) temporary based on a set duration (ex. activate the relay for 10 minutes then return to the default state); (b) perpetuated indefinitely until overridden.


Each of the units two relays can also be controlled automatically by any wireless sensor or group of sensors. Automatic relay switching can be triggered by setting the control parameters in a sensor notification from the system. The user can set the default state of each relay to on or off and user defined messages from sensors will cause the relay unit to switch to the non-default state. The relay switches back to its default state when the condition is no longer met.

Example Use: If a water sensor detects water at a certain level in a sump pit, the relay will switch ON, activating the pump. When water is no longer detected, the relay will switch OFF, deactivating the pump motor.

Wireless Control Unit Specifications

| Control Unit Relays | 10-Amp Units | 30-Amp Units |
|--|--|---|
| Initial Contact Resistance | Max. 100 mΩ | Max. 50 mΩ |
| Max Switching Power (resistive load) | 2500VA 150W (NO) 1662VA 150W (NC) | 8310VA (30 Amps, 277 VAC) |
| Max Switching Voltage | 250 VAC, 100 VDC (0.5 Amps) | 277 VAC |
| Max Switching Current | 10 Amps (AC), 5 Amps (DC) | 30 Amps |
| Nominal Operating Power | 360 mW | Approx. 800 mW |
| Operate Time (at nominal voltage / 20°C) | Max: 10 ms | Max: 20 ms |
| Release Time (at nominal voltage / 20°C) | Max: 10 ms | Max: 10 ms |
| Max Operating Speed | 20 times/min (at nominal switching capacity) | 20 times/min (at nominal switching capacity) |
| Number of Relays | 2 (individually controlled) | |
| Control Activation | <ul style="list-style-type: none"> • Automatic based on sensor notification settings • Manual through iMonnit online software | |
| Power | | |
| Input Power | 5.5 VDC @ 900 mA | |
| Mechanical | | |
| Antenna | Connector: SMA Gain (dBi): 3.0 | |
| Indicator Lights | Four LED indicators <ul style="list-style-type: none"> • Power • Radio (RF) communication • Relay 1 status (On/Off) • Relay 2 status (On/Off) | |
| Enclosure | ABS Plastic UL94V-0 flame rating | |
| Dimensions | 5.5 in. x 3.355 in. x 1.25 in. (139.7 mm x 85.217 mm x 31.75 mm) | |
| Weight | 8 ounces | |
| Environmental | | |
| Operating Temperature | -40°C to +85°C (-40°F to +185°F) | |
| Certifications: | 900 MHz product; FCC ID: ZTL- RFSC1 and IC: 9794A-RFSC1. 868 and 433 MHz product tested and found to comply with: CISPR 22:2008-09 / EN 55022:2010 - Class B and ETSI EN 300 220-2 V2.4.1 (2012-05). | |

Note: control units require a wireless gateway for operation.

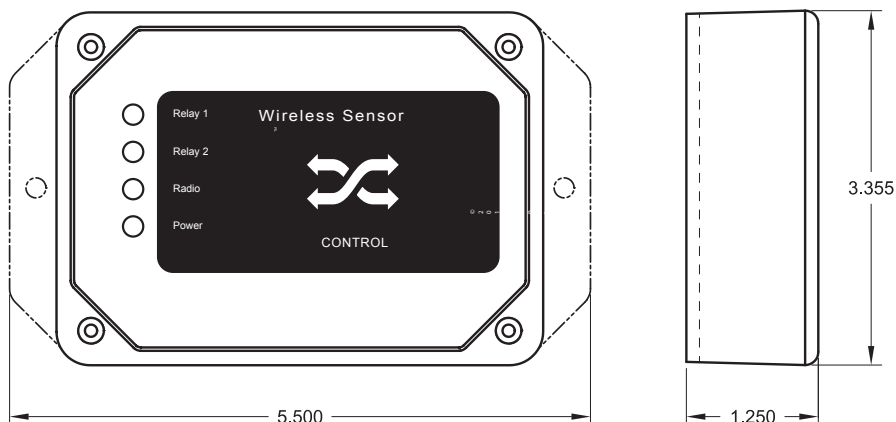

Notes:

Commercial Grade Sensors

IOT's commercial grade sensors are designed for applications in ordinary environments (normal room temperature, humidity and atmospheric pressure). Do not use these sensors under the following conditions as these factors can deteriorate the product characteristics and cause failures and burn-out.

- Corrosive gas or deoxidizing gas - chlorine gas, hydrogen sulfide gas, ammonia gas, sulfuric acid gas, nitric oxides gas, etc.)
- Volatile or flammable gas
- Dusty conditions
- Under low or high pressure
- Wet or excessively humid locations
- Places with salt water, oils chemical liquids or organic solvents
- Where there are excessively strong vibrations
- Other places where similar hazardous conditions exist

Use these products within the specified temperature range. Higher temperature may cause deterioration of the characteristics or the material quality.



6 Gibberd Road
Balcatta WA 6021
1300 131 776